


TKV-084-MODUL

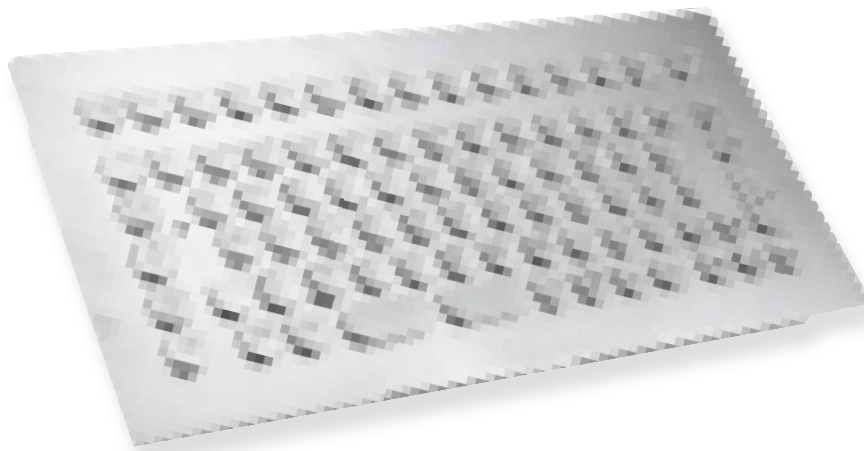

Features and benefits:

- Robust and durable
- Silicone switching elements
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Activation force 1 N / key travel 1.5 mm
- Semi or full customisation available

Specification


Number of Keys:	84
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	295 x 145 x 30 mm; 11.614" x 5.708" x 1.181"
Weight:	1700 g
Operating Temperature:	-40 °C to 90 °C; -40 °F to +194 °F
Frontplate Material:	stainless steel

Cat.-No.	Product Name	
KV01209	TKV-084-MODUL-PS/2-US	PS/2; US-Layout; compact version
KV01215	TKV-084-MODUL-USB-US	USB; US-Layout; compact version
KY13000	TKY-084-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		



FI-Kieliversio

TKV-084-MODUL

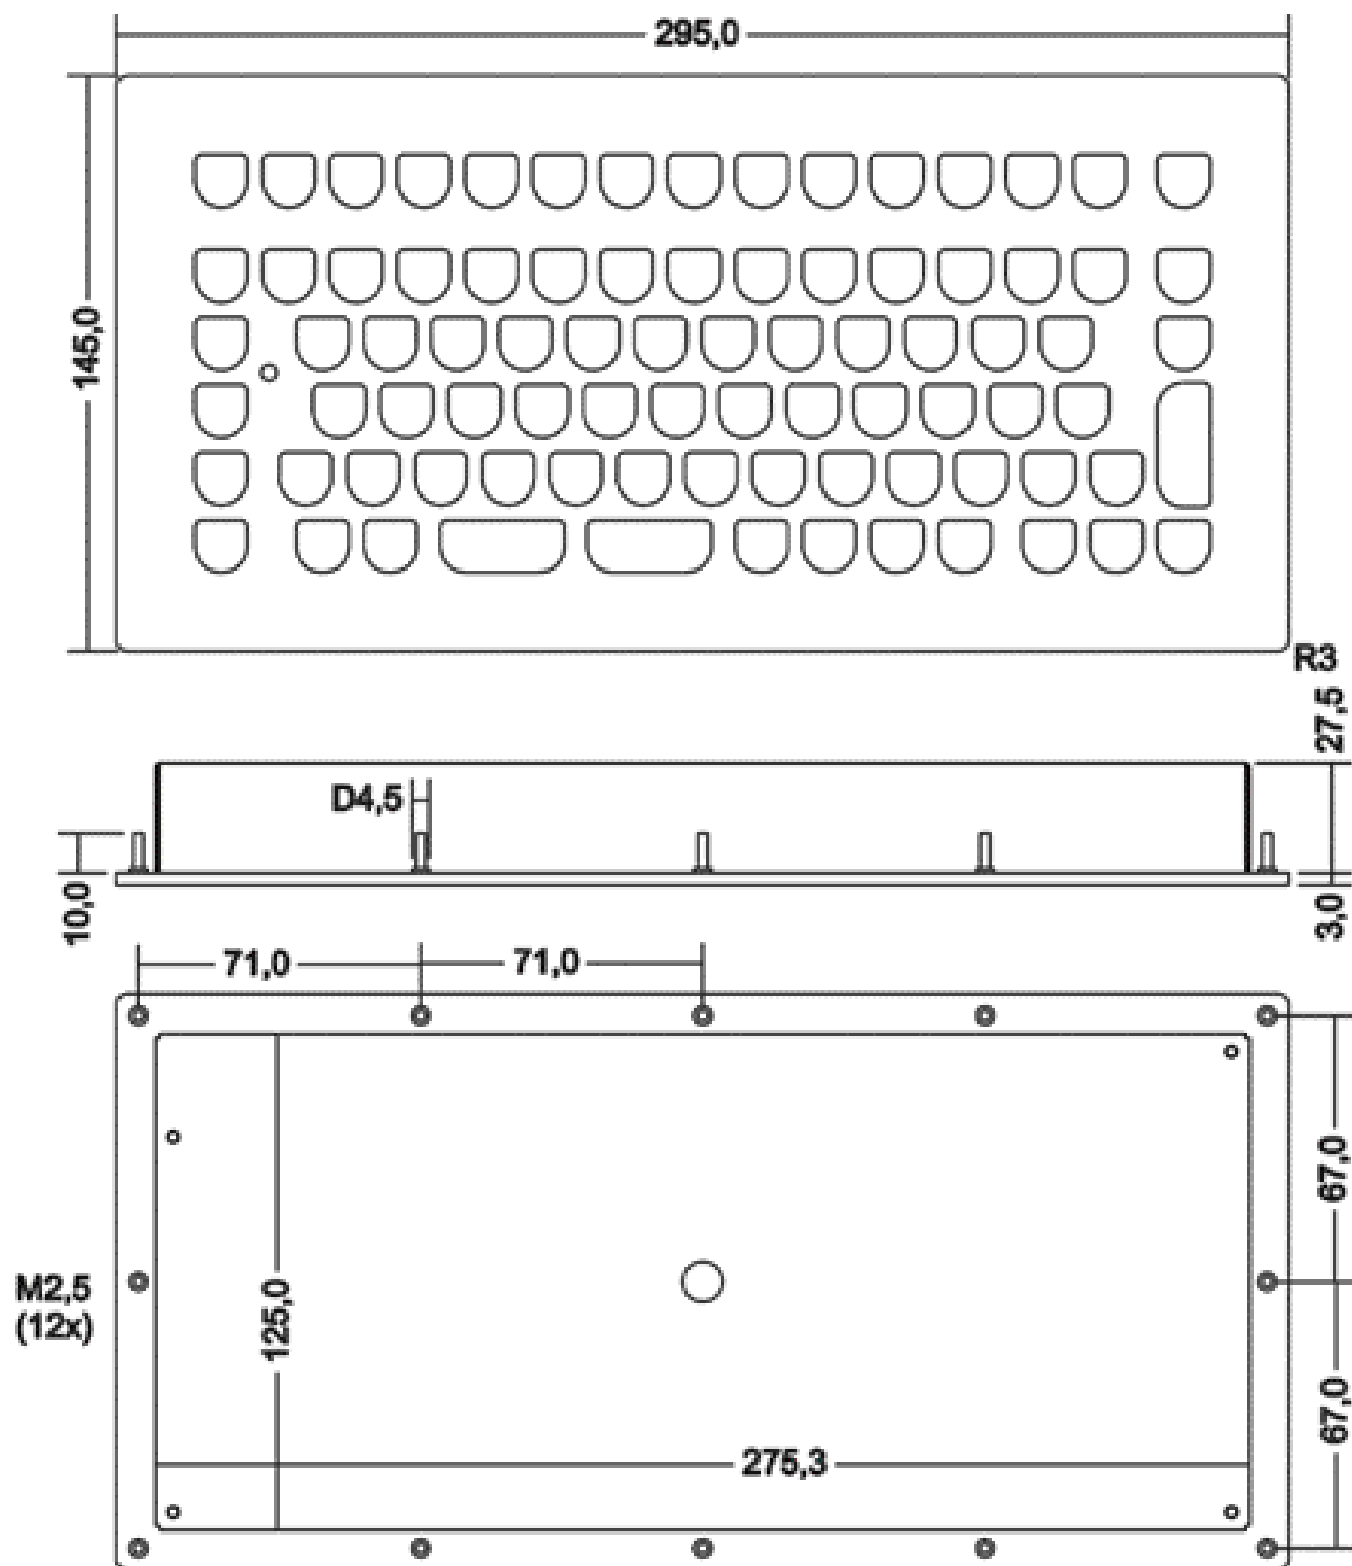

TKV-084-TB25V-MODUL



Features and benefits:

- Stainless steel keyboard with integrated 25 mm trackball
- Robust and durable
- Silicone switching elements
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Activation force 1 N / key travel 1.5 mm
- Semi or full customisation available

Specification Keyboard

Number of Keys: 84
 Keyswitch Technology: silicone switching element
 Actuation Force/-Travel: 1 N / 1,5 mm
 Keyswitch Lifetime: 10 mil. operations
 Protection Level: IP65; NEMA 4x
 Mounting Type: panel mount
 Dimensions: 370 x 145 x 33 mm;
 14.566" x 5.708" x 1.299"
 Weight: 2200 g
 Operating Temperature: -40 °C to 90 °C;
 -40 °F to +194 °F
 Frontplate Material: stainless steel


Specification Trackball

Ball Diameter: 25 mm; 1"
 Actuation Force: 65 g
 Protection Level: IP65 static; NEMA 3
 IP54 dynamic

Cat.-No.	Product Name	
KV01211	TKV-084-TB25V-MODUL-PS/2-US	PS/2; US-Layout; with trackball
KV01217	TKV-084-TB25V-MODUL-USB-US	USB; US-Layout; with trackball
KY13001	TKY-084-TB25V-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		




FI-Kieliversio

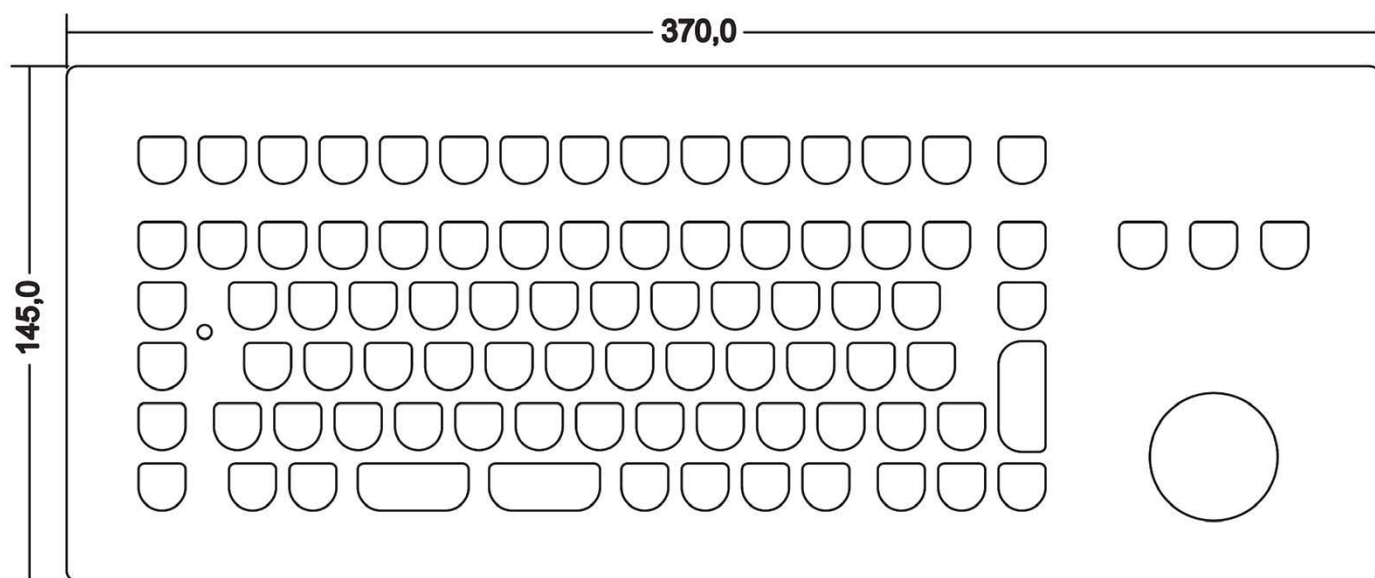

Frontside view

R3

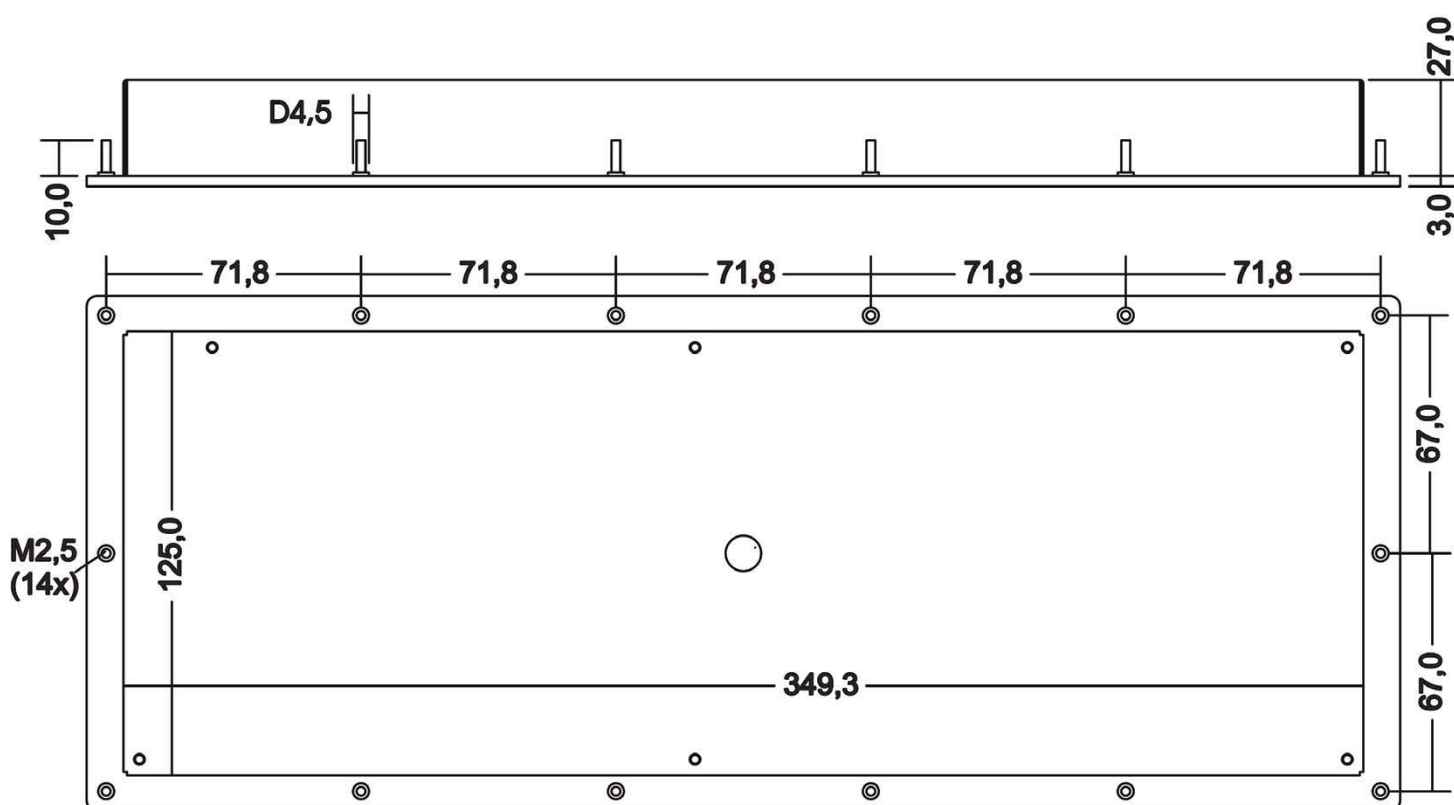

TKV-084-TOUCH-MODUL



Features and benefits:

- Stainless steel keyboard with integrated touchpad
- Robust and durable
- Silicone switching elements
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Activation force 1 N / key travel 1.5 mm
- Semi or full customisation available

Specification Keyboard

Number of Keys:	84
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	385 x 145 x 30 mm; 15.16 x 5.7 x 1.18"
Weight:	2200 g
Operating Temperature:	-40 °C to 90 °C; -40 °F to +194 °F
Frontplate Material:	stainless steel

Specification Touchpad

Motion Detection	
Method:	capacitive
Active Area:	60 x 44 mm
Protection Level:	IP65; NEMA4x

Cat.-No.	Product Name	
KV13001	TKV-084-TOUCH-MODUL-PS/2-US	PS/2; US-Layout; with touchpad
KV13003	TKV-084-TOUCH-MODUL-USB-US	USB; US-Layout; with touchpad
KY13004	TKY-084-TOUCH-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		



FI-Kieliversio

